

COMPACTORS

Vertical Compactor



6 Yard Shown

FEATURING:

- Extra Low Feed heights
- Reversible: Use for Front or Rear Feed Applications
- Available in 6 or 8 Cubic Yard Capacities
- Rugged Anchoring Platform
- Unit Cycles Automatically when Door is Closed
- Large Opening
- Clean and Aesthetic Application

ALL PRODUCTS ARE BUILT RUDCO TOUGH IN THE USA




Rental Program And Financing Available

Toll Free: 1.800.828.2234 • E-Mail: sales@rudco.com

www.rudco.com

COMPACTORS

Vertical Compactor

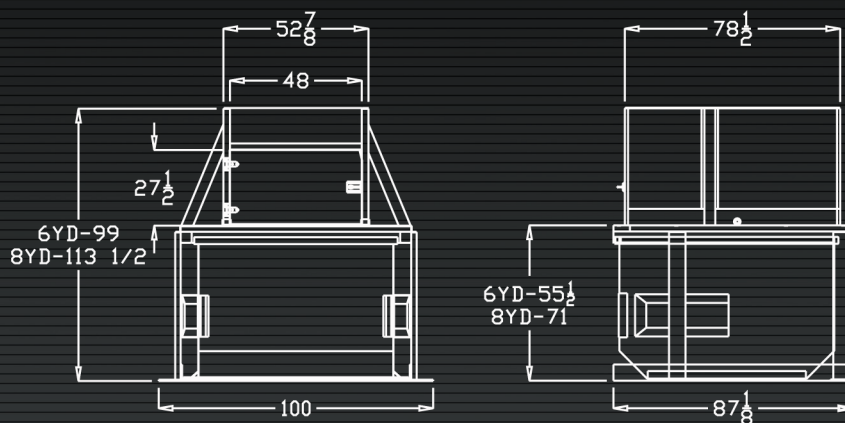

CHARGE BOX CAPACITY AND DIMENSIONS

| | | |
|------------------------------------|--|--|
| 6 & 8 CUBIC YARD CAPACITY | | FEED HEIGHT - 55-1/2" (6YD.) - 71" (8 YD.) |
| MANUFACTURERS RATING - .68 CU. YD. | | WASTE RATING -.68 CU YD. |
| HOPPER WIDTH - 48" | | HOPPER HEIGHT - 27-1/2" |
| HOPPER DEPTH - 37" | | RAM PENETRATION - 17" |

RAM DETAILS

| | | |
|--|--|---------------------------------|
| 3/16" RAM FACE PLATE W/ 5" X 3" X 1/2" ANGLE | | RAM FACE 1767 SQ IN. |
| 3/16" RAM SIDES | | 1-1/4" W/ GREASABLE PIVOT SHAFT |

PACKER FABRICATION DETAILS

| | | |
|------------------------------|--|---|
| 10 GA. HOUSING BOTTOM | | 11 GA. HOUSING SIDE W/ 6" X 2" X 3/16" SIDE STIFFENER |
| 6" X 2" X 1/4" BREAKER BAR | | 6" REAR MOUNT BEAM |
| 6" X 2" X 3/16" SUPPORT LEGS | | 4" ANGLE CONTAINER GUIDES W/ LOCK |

INTERNAL POWER UNIT - ELECTRICAL AND HYDRAULIC DETAILS

| | | |
|--------------------------------------|--|---|
| 3 HP MOTOR TEFC 208/230/460, 3 PHASE | | NEMA 12 CONTROL PANEL, UL RATED |
| 4.3 GPM PUMP CAPACITY | | 7 GALLON HYDRAULIC OIL TANK W/ SITE GAUGE |
| SINGLE CYLINDER SYSTEM | | 4" BORE X 2" ROD @ 16" STROKE |
| NORMAL PRESSURE - 2250 | | MAXIMUM PRESSURE - 2500 |
| NORMAL RAM FORCE - 28,260 | | MAXIMUM RAM FORCE - 31,400 |
| NORMAL RAM FORCE PSI - 16.0 | | MAXIMUM RAM FORCE PSI 17.77 |
| CYCLE TIME IN SECONDS - 20 | | CUBIC YARDS PER HOUR - 76 |

OPERATION DETAILS

| | | |
|---|--|--|
| PUSH BUTTON STARTER, AUTOMATIC CYCLE | | 100% FULL LIGHT |
| TURN KEY SWITCH MOUNTED BY DOOR | | DRIVER'S LIGHT REMOVABLE FOR MULTI POSITIONS |
| RAM RETRACTS, EXTENDS, RETRACTS & STOPS AUTOMATICALLY | | DOOR W/ SAFETY INTERLOCK |

OPTIONAL EQUIPMENT

| | | |
|--|--|--------------------------------|
| SINGLE PHASE, 3 HP, 220 VOLT, 2.5 GPM PUMP | | CHUTE KIT |
| 5 HP MOTOR TEFC 208/230/460, 3 PHASE | | DEODORIZER/SPRAY CAN ON TIMER |
| OIL HEATER | | PRESSURE GAUGE MOUNTED BY DOOR |
| STEEL PLATFORM | | 80% FULL LIGHT |

01/09 #125



CORPORATE OFFICE: 114 E. Oak Rd. • Vineland, NJ 08360 • Ph: 1.856.691.0800 • Fax: 1.856.696.0084

MAILING ADDRESS: P.O. Box 705 • Vineland, NJ 08362

Toll Free: 1.800.828.2234 • **E-Mail:** sales@rudco.com

www.rudco.com