COMPACTORS

Self-Contained Compactor



FEATURING:

- Meets ANSI Standards
- Remote Power Units with Cover
- UL Listed Relay Control Box
- Quick Disconnect
- Two 3" Fire Ports
- Operator's Controls with 15' Sealite
- Oil Level Sight Gauge with Thermometer
- Double End Pick-Up
- TEFC Motors (Tri-Voltage)
- Easy closing semi-automatic slam lock door (standard)

- 5" Channel welded inside to the face of the container to give it greater strength and longevity (standard)
- All compactors are primed and painted in one of ten standard colors
- Two grease fittings located on each side of charge box for preventative maintenance (standard)
- Controls: push button start, dead man/hand key switch, forward-reverse selection switch, mushroom emergency stop and 80% and 100% container full light (standard and manual override)
- PLC operated power unit

ALL PRODUCTS ARE BUILT RUDCO TOUGH IN THE USA







Rental Program And Financing Available

Toll Free: 1.800.828.2234 • E-Mail: sales@rudco.com





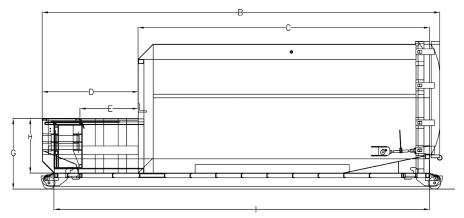

	RP-2000SB	RP-3000SB	RP-3500SB	RP-4000SB
CHARGE BOX CAP MFG. RATING	2.0 CUBIC YARDS	2.0 CUBIC YARDS	2.0 CUBIC YARDS	2.0 CUBIC YARDS
MSWMA RATING	1.57 CUBIC YARDS	1.57 CUBIC YARDS	1.57 CUBIC YARDS	1.57 CUBIC YARDS
CYCLE TIME	33 SEC.	33 SEC.	33 SEC.	33 SEC.
NORMAL RAM FORCE	39,900	39,900	39,900	39,900
MAXIMUM RAM FORCE	44,000	44,000	44,000	44,000
NORMAL OPERATING PRESSURE	1750	1750	1750	1750
MAX OPER. PRESSURE IN MANUAL MODE	2200	2200	2200	2200
MAX OPER. PRESSURE IN AUTO CYCLE	2000	2000	2000	2000
CYL (BORE X STROKE X ROD}	(2) 4"X30-88" X -2.5"			
MOTOR	10 HP	10 HP	10 HP	10 HP
PUMP SIZE	10.5 GPM	10.5 GPM	10.5 GPM	10.5 GPM
PACKER FLOOR	1/2" PLATE	1/2" PLATE	1/2" PLATE	1/2" PLATE
PACKER SIZES	1/4" PLATE W/ 6" CHANNEL			
RAM TOP	1/4" PLATE	1/4" PLATE	1/4" PLATE	1/4" PLATE
RAM FACE	1/2" PLATE W/4"X3" ANGLE			
CHARGE BOX OPENING	41" X 60"	41" X 60"	41" X 60"	41" X 60"
DIMENSION - A	96 - 1/2"	96 - 1/2"	104 - 1/2"	104 - 1/2"
DIMENSION - B	222"	282"	282"	306"
DIMENSION - C	144"	204"	204"	228"
DIMENSION - D	67 - 3/4"	67 - 3/4"	67 - 3/4"	67 - 3/4"
DIMENSION - E	41"	41"	41"	41"
DIMENSION - F	85 - 1/2"	85 - 1/2"	93 - 1/2"	93 - 1/2"
DIMENSION - G	49 - 1/2"	49 - 1/2"	49 - 1/2"	49 - 1/2"
DIMENSION - H	38 - 3/8"	38 - 3/8"	38 - 3/8"	38 - 3/8"
DIMENSION - I	204"	264"	264"	288"
WEIGHT	10,565	10,987	11,331	11,566

AVAILABLE OPTIONS

- Guide Rail 40" x 44"
- Doghouse W/ 30"x40" Door On Each Side
- Hopper 45° (Cellar Type) With Doors
- Thru-Wall Chute Side 40"H x 96"L W/ Door (40" x 40" Free Standing Chute)
- Thru-Wall Chute Rear 40H x 96"L With Door (40" x 40" Free Standing Chute)
- Hinged Dock Extension
- Single Phase Power Unit
- Multi Cycle Timer
- Low Oil Shutdown

RUDCO RESERVES THE RIGHT TO REVISE, AMEND AND IMPROVE IT'S EQUIPMENT WITHOUT NOTICE

CORPORATE OFFICE: 114 E. Oak Rd. • Vineland, NJ 08360 • Ph:1.856.691.0800 • Fax: 1.856.696.008 MAILING ADDRESS: P.O. Box 705 • Vineland, NJ 08362

Toll Free: 1.800.828.2234 • E-Mail: sales@rudco.com Phone: 1.856.691.0800 • Fax: 1.856.696.008



- Hi Temp Low Oil Shutdown Color Pressure Gauge
- Oil Heater
- Ozone Odor Control System
- Additional Options Available