

CONTAINERS

RUDCO

Storage Container



Shown With Optional
Barn Style Rear Door Upgrade

FEATURING:

- Lifetime Guarantee on Hook and Hook Plate
- Rudco Roll-Offs feature tube main rails with solid bullnose
- All containers are primed and painted in one of ten standard colors
- Formed front corner posts for added strength
- Non-Sagging Door is designed to rest on floor of container
- Large "V" notches in each vertical support column prevents moisture retention


ALL PRODUCTS ARE BUILT RUDCO TOUGH IN THE USA



Rental Program And Financing Available

Toll Free: 1.800.828.2234 • E-Mail: sales@rudco.com

www.rudco.com

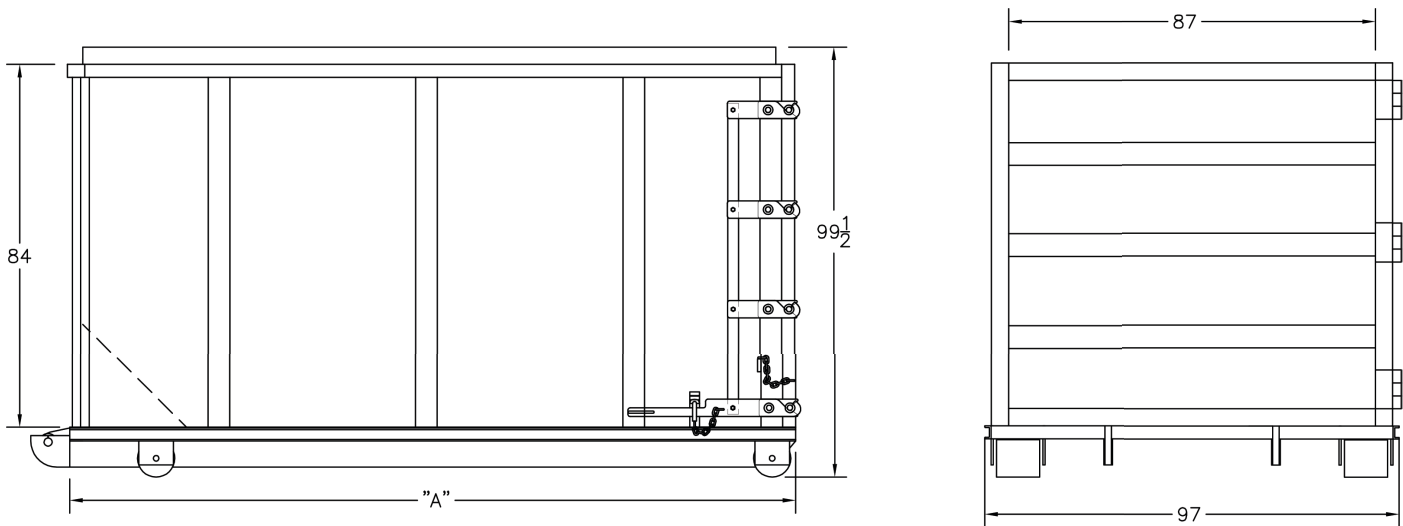

CONTAINER SIZE	(A) DECK LENGTH	(B) OVERALL LENGTH	APPROXIMATE WEIGHT
25 YD	168"	179"	3,500 LBS.
29 YD	192"	203"	4,000 LBS.
34 YD	216"	227"	4,550 LBS.
40 YD	264"	275"	5,700 LBS.

STANDARD DECK

- 3/16" PL. Floor 2 Piece
- 3" Structural Channel on 20" Centers
- 3/16" PL. Gussets on every other Cross Member
- 6" x 2" x 3/16" Tube One Piece Main Rails
- 4" Diameter x 4" Long Bullnose Rollers W/ 1-1/2" Greasable Pin
- 1" Cable Hook PL With 1 1/4" Solid Cable Hook
- (4) 8" Diameter x 10" Long Heavy Duty Wheels W/ 1-1/4" Diameter Axles

FRONT AND SIDES

- 12 Ga. Sheet
- 12 Ga. Front Sheet
- 4" x 3" x 11 Ga. Top Tube

REAR CORNER POST

- 4" x 3" x 11 Ga. Tube

ROOF

- 4" Pitch with 12 Ga. sheets and 3" channel support

REAR DOOR

- Swing Door 40 Yd. OT
- Optional Upgrade: Barn Style Rear Door
- 11 Ga. Sheet w/ 4" x 3" x 11 Ga. Tube Frame and 3/8" Safety Chain

- Hinges 1/2" x 7" x 9" and 1/2" x 3" x 3" Plates with 2" OD Mechanical Tube Bushings with Grease Fittings and one 3/16" Cold Rolled Pin
- Non-Sagging Door is designed to rest on the floor of the container

DOOR LOCK

- Southern Style Latch - Hook & Pin System
- Upgrade Option: Cam action type door lock, 1 -1/4" Cams on 1-1/4" Dia. solid bar to 3/8" Locking Plates. Swing Handle is securely welded to a cam assembly rod for easy opening and closing operations. Handle is secured by 1/2" x 2" bar stock with safety chain.

TOP

- 4" Pitch Roof With 11 Ga. Steel 3" Channel Supports

NOTE: Recycle Containers can be stacked 5 or 6 per load. This saves freight cost per container. However, when stacking and unstacking, doors have to be removed and re-hung, and the containers may be scratched or dented. We cannot be responsible for this happening since it is unavoidable when stacking containers.

RUDCO RESERVES THE RIGHT TO REVISE, AMEND AND IMPROVE IT'S EQUIPMENT WITHOUT NOTICE

CORPORATE OFFICE: 114 E. Oak Rd. • Vineland, NJ 08360 • Ph: 1.856.691.0800 • Fax: 1.856.690.0556

MAILING ADDRESS: P.O. Box 705 • Vineland, NJ 08362

Toll Free: 1.800.828.2234 • E-Mail: sales@rudco.com
Phone: 1.856.691.0800 • Fax: 1.856.696.008

rudco.com